Albert Broadcast Services, Inc. PO Box 11836 Charlotte, NC 28220-1836 (704) 507-4987

October 29, 2022

Alex Snipe WQXL PO Box 2355 West Columbia, SC 29171

Re: 2022 NRSC Emissions Report for WQXL

Dear Alex:

I am pleased to enclose your 2022 NRSC Equipment Performance Measurements for WQXL, certifying compliance with section 73.44 of the Federal Communications Commission rules and regulations regarding emission requirements.

This document or a copy thereof should be uploaded to the station public access file for WQXL. It has been our pleasure to provide this service for you. If we can be of further service, please do not hesitate to contact me directly.

Cordially,

Stu Albert, President

AM Transmission System (NRSC) Emission Measurements



Columbia, SC

AM Transmission System Emission Measurements

WQXL Columbia, SC

October 25, 2022

The radiated emissions of WQXL, 1470 KHz, Columbia, SC were measured on October 25, 2022. The measurements were made by Albert Broadcast Services, Inc. utilizing an RF Spectrum Analyzer, Anritsu model MS2721B, serial number 747076. The analyzer was warmed for a period of 15 minutes to its normalized temperature before measurements began. The instrument was located one kilometer from the station's antenna. The receive antenna connected to the spectrum analyzer was a three-turn broadband, non pre-amplified loop antenna manufactured by Belar Corporation.

The spectrum analyzer was set to operate with maximum (no) video filter, 300 Hz resolution filter bandwidth and for a minimum 10 minute peak hold duration for each measurement. Sweep resolutions of 5.0, 10.0 and 20.0 KHz per horizontal division were utilized where appropriate to allow various degrees of measurement resolution.

Emissions from 10.2 KHz to 20 KHz removed from the carrier were measured at greater than 25 dB below the un-modulated carrier level. Emissions 20 KHz to 30 KHz removed from the carrier were measured at greater than 35 dB below the un-modulated carrier. Emissions from 30 KHz to 60 KHz removed from the carrier were attenuated at least 5+1dB/KHz below the un-modulated carrier level. Emissions between 60KHz and 75KHz were measured at greater than 65 dB below the un-modulated carrier level. Emissions removed by more than 75 KHz were measured up to 5.0 MHz, using a Potomac FIM-41 field intensity meter, serial number 1542, in addition to observation on the spectrum analyzer.

The measurements contained herein certify that the station was found in compliance with Federal Communication Communications Commission rule 73.44 regarding emission limitations at the time of measurement.

Steward R. Albert, President Albert Broadcast Services, Inc.

Harmonic Measurements

WQXL Columbia, SC 10/25/2022

The following tabulated results of Harmonic Ratio were measured by noting the dB scale reading at the carrier frequency, then tuning the field intensity meter to the desired harmonic and measuring the field strength, while noting the N number positions that the Full Scale switch of the field strength meter was moved to obtain an on scale reading. The Harmonic Ratio was then calculated using the formula:


dB (Harmonic) - dB (Fundamental) + (Nx20)dB

Required level of attenuation: 43+10 Log (power in watts) or 80 dB,

whichever is less.

Station power: 11,000 Watts Attenuation Required: 83.5 dB

Frequency	Measured Field Strength (dB)	Harmonic Ratio
1470 KHz (Carrier)	2.10 V/m (13.5 dB Ref)	Reference 0
2940 KHz		-83.6 dB
4410 KHz		-84.5 dB

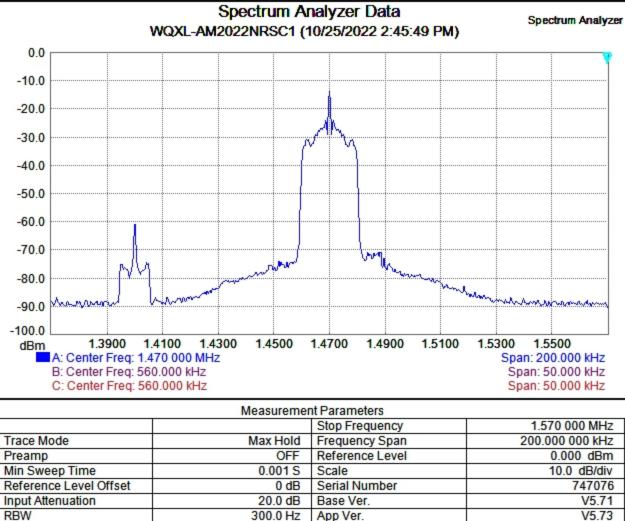

-90.0	Lament Town		man	Manage Ma
-100.0 1.3900 1	4100 1.4300 1.4500	1.4700 1.4900	1.5100	1.5300 1.5500
A: Center Freq: 1.4		1.1700	1.0100	Span: 200.000 kHz
B: Center Freq: 56				Span: 50.000 kHz
C: Center Freq: 56				Span: 50.000 kHz
Measurement Parameters				
		Stop Frequency		1.570 000 MHz
Trace Mode	Max Ho	d Frequency Span		200.000 000 kHz
Preamp	OF	F Reference Level		0.000 dBm
Min Sweep Time	0.001 S Scale		10.0 dB/div	
Reference Level Offset	0 dB Serial Number			747076

3.0 MHz

1.470 000 MHz

1.370 000 MHz

Peak

Model

Date

Options

Device Name

MS2721B

10/25/2022 2:45:49 PM


25, 27

VBW

Detection

Center Frequency

Start Frequency

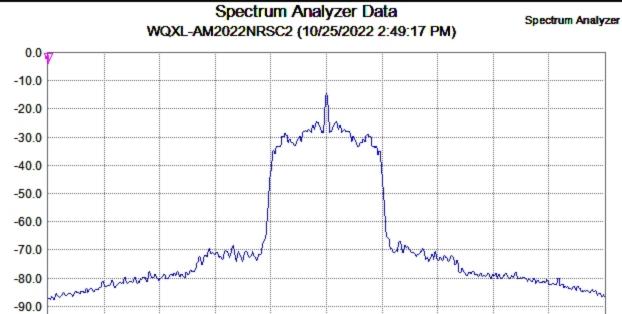

mande						- Charles Many Control
				<u> </u>	<u>i</u>	
-100.0						
	4400 1.4500 1.460	0 1.4700	1.4800	1.4900	1.5000	1.5100
ubiii		0 1.4700	1.4000	1.4900		
A: Center Freq: 1.4						n: 100.000 kHz
B: Center Freq: 56	0.000 kHz				Spa	an: 50.000 kHz
C: Center Freq: 56	0.000 kHz				Spa	an: 50.000 kHz
Measurement Parameters						
		Stop Fr	requency			1.520 000 MHz
Trace Mode	Max Hold Frequency Span			1	00.000 000 kHz	
Preamp	0	FF Refere	nce Level			0.000 dBm
Min Sweep Time	0.00	1S Scale				10.0 dB/div
Reference Level Offset	0 dB Serial Number			747076		
Input Attenuation	20.0	dB Base V	/er.			V5.71
RBW	300.0	Hz App Ve	er.			V5.73

G: Center Freq: 560.000 kHz			Span: 50.000 kHz	
Measurement Parameters				
		Stop Frequency	1.520 000 MHz	
Trace Mode	Max Hold	Frequency Span	100.000 000 kHz	
Preamp	OFF	Reference Level	0.000 dBm	
Min Sweep Time	0.001 S	Scale	10.0 dB/div	
Reference Level Offset	0 dB	Serial Number	747076	
Input Attenuation	20.0 dB	Base Ver.	V5.71	
RBW	300.0 Hz	App Ver.	V5.73	
VBW	3.0 MHz	Model	MS2721B	

Detection Options 25, 27 Peak Center Frequency 1.470 000 MHz Date 10/25/2022 2:49:17 PM

Device Name

1.420 000 MHz

Start Frequency

